

Distribution Tray

perforated

RSV 110.200 S






EAN Code: 4013339259205

Smallest packaging unit: 2 x 3 m

quantity unit: m M



the photorealistic images are to be considered as reference images

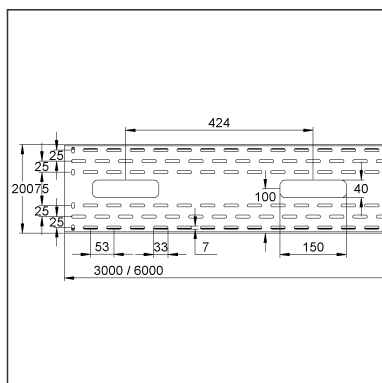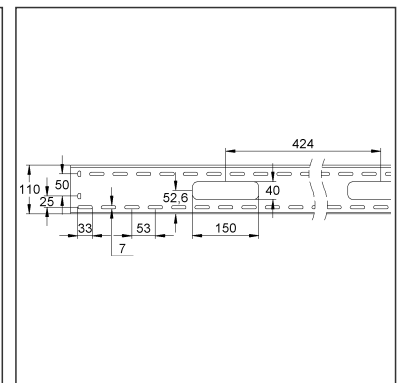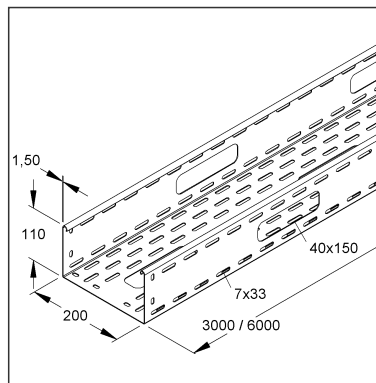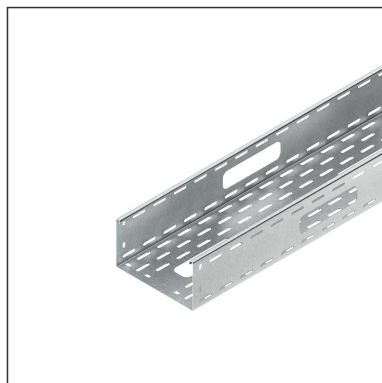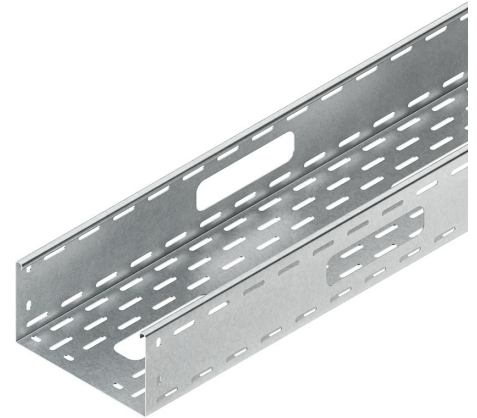

Article Description

Distribution tray, 110x200x3000 mm, perforated, ???

Technical Datasheet

Cable Tray System

RSV 110.200 S

the photorealistic images are to be considered as reference images

Incl. accessories

3 meter = 1 piece		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
1-FLM 6X12	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, electro galvanised according to DIN EN ISO 2081/4042, blue pass	12 pcs.	
1-RV 110.200	Splice plate, single, U-shaped, 99x197 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories	1 pcs.	
6 meter = 1 bundle		✓ lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
FLM 6X12	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, electro galvanised according to DIN EN ISO 2081/4042, blue pass	24 pcs.	
RV 110.200	Splice plate, single, U-shaped, 99x197 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories	2 pcs.	
192 meter = 1 rack		- lowest delivery unit	- preferred delivery unit
Model No.	Description	quantity	
FLM 6X12	Mushroom-head bolt M6, similar DIN 603, length 12 mm, steel, electro galvanised according to DIN EN ISO 2081/4042, blue pass	768 pcs.	
RV 110.200	Splice plate, single, U-shaped, 99x197 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories	64 pcs.	

Additional Price Information

Article group	N13
quantity unit	m

Weight

Weight per quantity unit	4,339 kg / m
Weight in kg per 100	434 kg / 100m

Physical Article Dimensions

Height	110.00 mm
Width	200.00 mm
Depth/length	3000 mm


Technical Datasheet

Cable Tray System

RSV 110.200 S

the photorealistic images are to be considered as reference images

Load Specifications

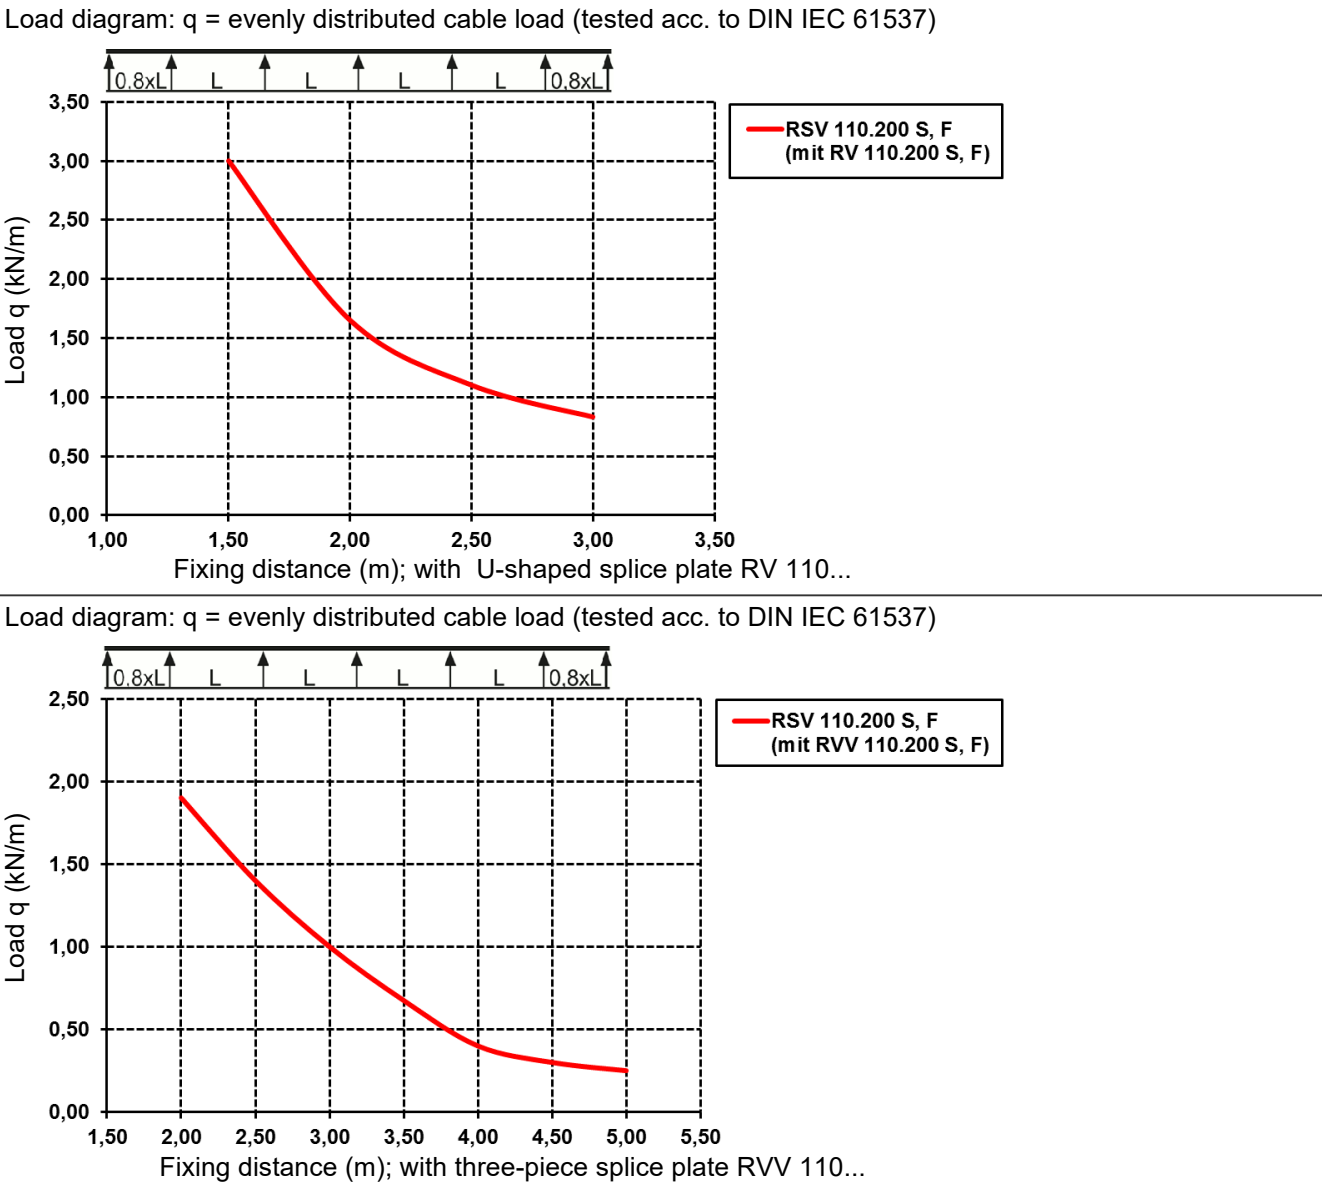

Packing Dimension

6 meters = 1 bundle		✓ VP1-smallest packaging unit (PU)	✓ VP1-preferred PU		
Lenght	3000 mm	Width	205 mm	Height	115.00 mm
Gross weight	26 kg	Volume	0,071 m³		
Min. quantity	6.00 m	Max. Quantity	6.00 m		
192 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	931 kg	Volume	3,904 m³		
Min. Quantity	192.00 m	Max. Quantity	192.00 m		

Tender Text

Technical Datasheet

Cable Tray System

RSV 110.200 S

the photorealistic images are to be considered as reference images

Tender Text

Distribution cable tray acc. to DIN EN 61537, with offset bottom and side perforations for continuous mounting of the system components, side and bottom outlets are provided for cable and line feed-through, including one-piece U-shaped splice plate RV 110... and proportionate fastening accessories.

Dimensions (approx. dimensions) H x W : 110 x 200 mm

Material thickness : 1.5 mm

Bottom and side outlets : 40 x 150 mm

Delivery length : 3000 mm

Usable cross section : 22000 mm²

Material : steel, pre-galvanised to DIN EN 10346

NIEDAX Model No. : RSV 110.200 S

EP Material_____ EP Wage_____

Unit price/meter

Safety & Environment

REACH Date	05.11.2025
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RD 200	Cover for cable tray/-ladder, with joint strip, 202x3000 mm, steel, pre-galvanised according to DIN EN 10346
RDHF 9 E2	Cover clamp, stainless steel, material code: 1.4310
RDHK 110 E2	Cover retaining clamp, height 108 mm, stainless steel, material code: 1.4310
RDRS 9	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RDV 200	Cover for cable tray/-ladder, with joint strip, 202x3000 mm, steel, pre-galvanised according to DIN EN 10346

Barrier strip

Model No.	Description
RW 110	Barrier strip, 98x3000 mm, t=0,9 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories